


Name: NICKELL.C
 Date: _____
 Track: BLACK COUNTRY ARENA

Track Conditions

- Size: Open Med. Tight
 Traction: High Med. Low
 Surface: Smooth Med. Bumpy


Front Suspension

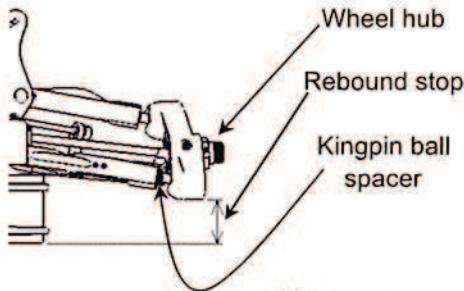

Kingpin ball spacer 1 mm
 Camber angle 1 °
 Upper arm spacer 0 mm
 Toe angle _____ °
 Rebound stop 1 mm
 Anti-roll bar ϕ 3 mm
 Wheel hub STOCK mm
 Lower arm mount (Kick up) 0 1




Lower arm plate (E0154A)
 Upper arm position (E0148B, E0148C)

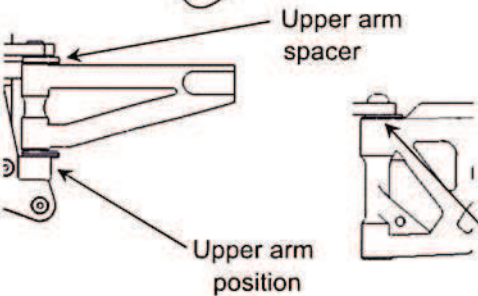

Lower arm spacer 2 mm

Front Shocks


Piston STOCK
 Oil # 650 RB
 Spring 3,5
 Spring adj. _____ mm




Steering Ackerman






Rear Suspension

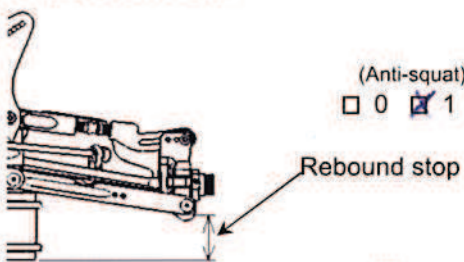

Camber angle 4 °
 Lower arm mount E0185 (Aluminium) 1
 (Toe angle) 2,75 °
 Rebound stop 1 mm
 Anti-roll bar ϕ 3 mm
 Anti-squat (E0111C, E0111D)

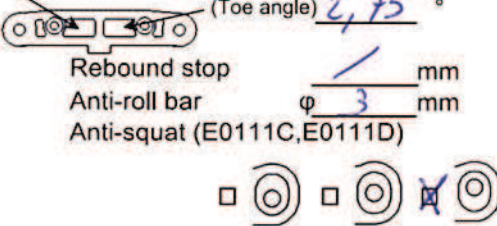


Upright E0152 E0173 (Aluminium)
 Wheelbase adjustment 2 mm

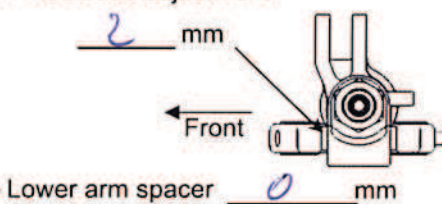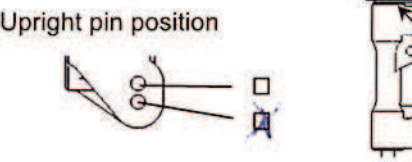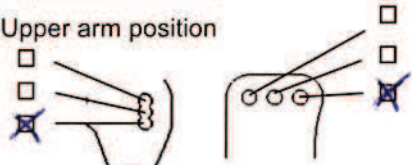


Rear Shocks

Piston STOCK
 Oil # 550 RB
 Spring 10,5
 Spring adj. _____ mm



Wing Position



Power Train

Motor LEOPARD 1800KV
 ESC LEOPARD
 Battery TCC POWER 5200 MAH 30C

Diff. Oil

Front # 15000 RB O-Ring - pcs. Other P
 Center # 7000 RB - pcs. Other _____
 Rear # 5000 RB - pcs. Other P

Tire

Front Type MINI SPIKE Y Rear Type MINI SPIKE Y
 Foam PROLINE BLEU Foam PROLINE BLEU

Gearing

Pinion gear 14 T
 Spur gear 46 T

Result

Race time / Lap _____
 Best lap (1Lap) 21,3 sec

Comments:

HAUTEUR DE Caisse AV: 23 mm ARR: 25 mm
Recherche ressort MUGEN AV: E0551
ARR: E0554